


MKR SERIES-AXIAL LOCKING

軸向鎖定

- Material — SCM440
- Hardness — HRC 28-32
- Precision — ISO 4H


- 材質 SCM440
- 硬度 HRC28-32
- 精度 ISO 4H

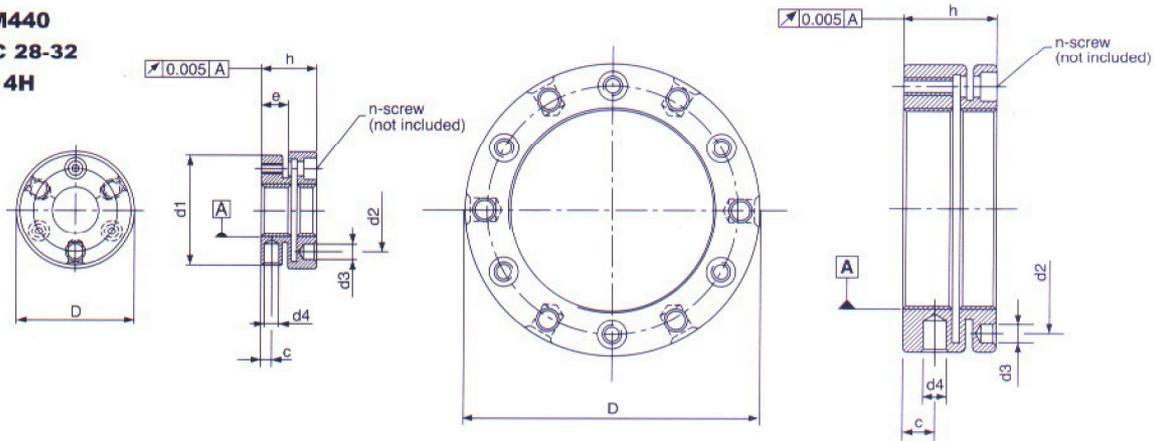


註：本產品不包含螺絲

TYPE & Pitch	Dimensions									Helical Angle	Screw		Torque kg-cm
	D	h	e	d1	d2	d3	d4	c	DIN		n		
MKR 10 x 0.75P	24	14	6.5	22	17	3.2	2.5	3	1.44	M3 x10	3	20	
MKR 10 x 1.0P		15											
MKR 12 x 1.0P	26	14		25	19		3						1.61
MKR 12 x 1.5P		15	2.48										
MKR 14 x 1.5P	32	16		7	30	22.5	4.3	4	3	2.10	M4 x10	3	30
MKR 15 x 1.0P	33		31		23.5								
MKR 16 x 1.5P	34	18	-	24.5		5		1.82					
MKR 17 x 1.0P	35		-	25.5	1.21								
MKR 18 x 1.5P	36	18	-	26.5		4.3	4	5	1.61	0.94	M4 x12	4	30
MKR 20 x 1.0P	40				18								
MKR 20 x 1.5P		1.30											
MKR 22 x 1.5P	42		18	-	32.5	4.3	4	5	1.19	M4 x16	4	30	
MKR 24 x 1.5P		45											20
MKR 25 x 1.5P	1.09												
MKR 26 x 1.5P		46	20	-	38.5	4.3	5	6.5	0.94	M4 x16	4	30	
MKR 28 x 1.5P	48												20
MKR 30 x 1.5P		50	22	-	42.5	4.3	5	7	0.80				
MKR 32 x 1.5P	53									22	-	45.5	4.3
MKR 35 x 1.5P		58	22	-	48.5	4.3	5	7	0.70				
MKR 38 x 1.5P	58									22	-	50.5	4.3
MKR 40 x 1.5P		60	22	-	52.5	4.3	5	7	0.62				
MKR 42 x 1.5P	68									25	-	58	4.3
MKR 45 x 1.5P		M4 x16	6	9	0.56								
MKR 48 x 1.5P	70					25	-	59.5	4.3	6	9	0.58	
MKR 50 x 1.5P		M4 x16	6	9	0.56								


1.

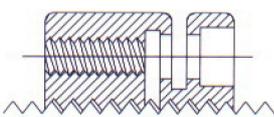

2.

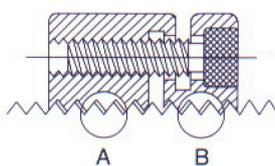

3.


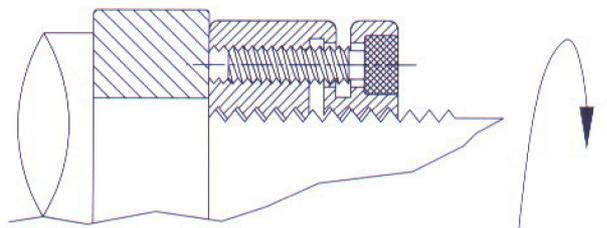


MKR SERIES-AXIAL LOCKING

軸向鎖定

- Material — SCM440
- Hardness — HRC 28-32
- Precision — ISO 4H

- 材質 SCM440
- 硬度 HRC28-32
- 精度 ISO 4H

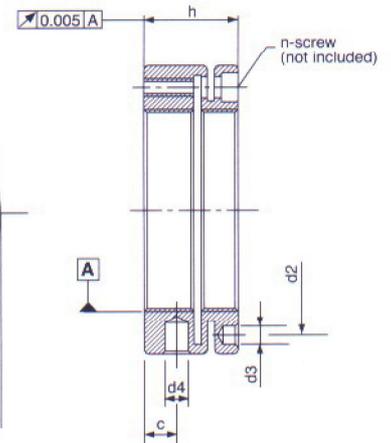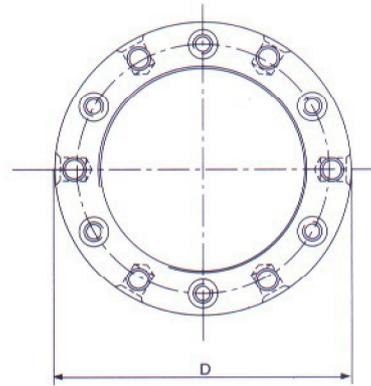

註：本產品不包含螺絲

TYPE & Pitch	Dimensions								Helical Angle	Screw		Torque kg-cm	
	D	h	e	d1	d2	d3	d4	c		DIN	n		
MKR 52 x 1.5P	72	25			63.5	4.3	6	9	0.54	M4 x 16	6	30	
MKR 55 x 1.5P	75				72.5				5.3				0.51
MKR 55 x 2.0P	82				74.5				6				0.68
MKR 58 x 1.5P	84	26	-	-	74.5	5.3	6	9	0.48	M5 x 16	6	61	
MKR 60 x 1.5P	84				76.5				5.3				0.46
MKR 60 x 2.0P	86	28			76.5	5.3	6	10.5	0.62	M5 x 20	6	61	
MKR 62 x 1.5P	86				78.5				5.3				0.45
MKR 65 x 1.5P	88				83				5.3				0.43
MKR 65 x 2.0P	95	28			83	5.3	8	9.5	0.57	M5 x 20	6	61	
MKR 68 x 1.5P	95				85				5.3				0.41
MKR 70 x 1.5P	95				86				5.3				0.39
MKR 70 x 2.0P	98	28	-	-	86	6.4	8	8.5	0.37	M6 x 20	6	102	
MKR 72 x 1.5P	98				88				6.4				0.50
MKR 75 x 1.5P	100				95				6.4				0.39
MKR 75 x 2.0P	110	32			95	6.4	8	11	0.46	M6 x 20	6	102	
MKR 80 x 2.0P	110				100				6.4				0.44
MKR 85 x 2.0P	115				108				6.4				0.41
MKR 90 x 2.0P	120	32	-	-	108	6.4	8	11	0.39	M6 x 20	6	102	
MKR 95 x 2.0P	125				113				6.4				0.37
MKR 100 x 2.0P	130				118				6.4				0.35
MKR 105 x 2.0P	135	32			123	6.4	8	11	0.34	M6 x 25	6	102	
MKR 110 x 2.0P	140				128				6.4				0.32
MKR 115 x 2.0P	145				133				6.4				0.31
MKR 120 x 2.0P	155	36	-	-	140	6.4	10	12	0.37	M6 x 25	8	102	
MKR 125 x 2.0P	160				148				6.4				0.29
MKR 130 x 3.0P	165				153				6.4				0.43
MKR 140 x 3.0P	180	36	-	-	165	6.4	10	12	0.40	M6 x 25	8	102	
MKR 150 x 3.0P	190				175				6.4				0.37
MKR 160 x 3.0P	205				185				6.4				0.35
MKR 170 x 3.0P	215	40	-	-	195	8.4	10	14	0.33	M8 x 30	8	255	
MKR 180 x 3.0P	230				210				8.4				0.31
MKR 190 x 3.0P	240				224				8.4				0.29
MKR 200 x 3.0P	245				229				0.28				