

# SGM-C 鋼片型 / 夾緊式 / 撓性聯軸器

DISK / CLAMP TYPE / FLEXIBLE COUPLING



## 材質 | Material

鋁合金 Aluminum alloy  
緩衝材: 不銹鋼彈片  
Buffer material: SUS disk

## 表面處理 | Surface Treatment

陽極處理 Anodizing standard white

## 特性 | Features


1. 扭力大
2. 偏角誤差較佳
3. 低慣性
4. 零背隙
5. 適用於工作母機、伺服馬達、高精密傳動
6. 固定方式: 夾緊式

- High torque
- High deflection
- Low inertia
- Zero backlash
- Suitable for working machine, servomotor and high precision transmission mechanism.
- Fixed mode: Clamp type

## 型號表示 | Product NO

**SGM-50C- $\phi$ 20x $\phi$ 20**

型號 / Type      孔徑 / Inside dia

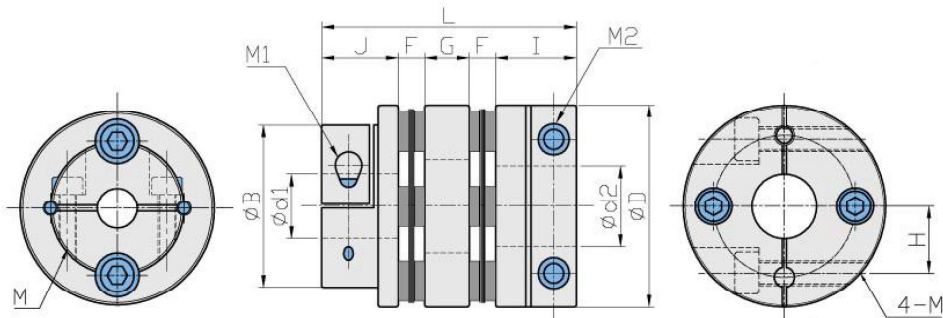

## 尺寸 | Dimension

單位 / Unit:mm

Catalog Number 型號	D	B	J	F	G	I	L	M1	M2	d1xd2 標準孔徑 (H7)		Mass** 重量 (g)
										Min	Max	
<b>SGM-40C</b>	40	28	15	4.5	9	15	48	1-M4	2-M4	8	16	121
<b>SGM-45C</b>	45	33	15	4.5	9	15	48	2-M4	2-M4	8	18	130
<b>SGM-50C</b>	50	40	20	6	11	20	63	2-M5	2-M5	10	20	250
<b>SGM-57C</b>	57	42	20	6	11	20	63	2-M5	2-M5	12	25	270
<b>SGM-65C</b>	65	50	24	7	14	24	76	2-M6	2-M6	12	28	550

## 性能 | Specifications

單位 / Unit:mm

Catalog Number 型號	Rated Torque 一般扭力 (N.m)	Max. Torque 最大扭力 (N.m)	Max Rotational Frequency 最高回轉速 (Rpm/min)	Moment* of Inertia 慣性 (Kg · m <sup>2</sup> )	Errors of Eccentricity 容許偏心 (mm)	Errors of Shaft End-Play 容許軸向位差 (mm)	Errors of Angularity 容許偏角 (°)
<b>SGM-40C</b>	6	12	10000	20.5x10 <sup>-6</sup>	0.2	± 0.6	1.5
<b>SGM-45C</b>	9	18	10000	35.1x10 <sup>-6</sup>	0.2	± 0.6	1.5
<b>SGM-50C</b>	17	34	10000	73.3x10 <sup>-6</sup>	0.2	± 0.8	1.5
<b>SGM-57C</b>	25	50	10000	112.3x10 <sup>-6</sup>	0.25	± 0.8	1.5
<b>SGM-65C</b>	55	110	10000	286.1x10 <sup>-6</sup>	0.3	± 0.9	1.5