
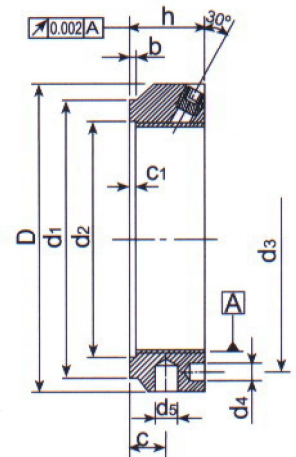


TMF SERIES - 30° LOCKING

30°鎖定

- Material — SCM440
- Hardness — HRC 28-32
- Precision — ISO 4H

- 材質 SCM440
- 硬度 HRC28-32
- 精度 ISO 4H

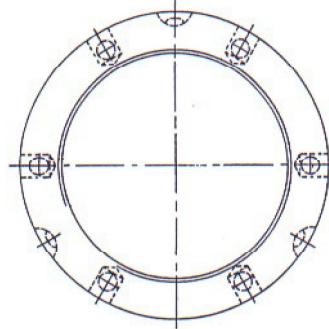

TYPE & Pitch	Dimensions											Axial Load Static kN	Loosening Torque kg-cm	Screw Torque	
	D	h	d ₁	d ₂	d ₃	d ₄	d ₅	b	c	c ₁	DIN			Max kg-cm	
TMF25 x 1.5P	42	20	35	26	32.5	4.3	4	2	11	2	2	130	450	M6	80
TMF30 x 1.5P	48		40	32	40.5										
TMF35 x 1.5P	53		47	38	45.5										
TMF40 x 1.5P	58	22	52	42	50.5	6	6	12	13	3	3	210	800	M8	190
TMF45 x 1.5P	68		58	48	58										
TMF50 x 1.5P	70	24	63	52	61.5	5.3	8	3	13	3	3	300	1150	M10	360
TMF55 x 1.5P	75		70	58	66.5										
TMF60 x 1.5P	84		75	62	74.5										
TMF65 x 1.5P	88	25	80	68	78.5	6.4	8	3	14	3	3	460	1700	M10	360
TMF70 x 1.5P	95	26	86	72	85										
TMF75 x 1.5P	100		91	77	88										
TMF80 x 2.0P	110	30	97	83	95	8.4	10	5	15	5	5	620	3250	M10	360
TMF85 x 2.0P	115	32	102	88	100										
TMF90 x 2.0P	120		110	93	108										
TMF95 x 2.0P	125		114	98	113										
TMF100 x 2.0P	130	32	120	103	118	10	5	5	16	5	5	740	8400	M10	360
TMF110 x 2.0P	140		132	112	128										
TMF120 x 2.0P	155		142	122	140										
TMF130 x 3.0P	165	32	156	132	153	10	5	5	17	5	5	920	12000	M10	360
TMF140 x 3.0P	180		166	142	165										
TMF150 x 3.0P	190		180	152	175										
TMF160 x 3.0P	205	32	190	162	185	10	5	5	17	5	5	980	13200	M10	360
TMF170 x 3.0P	215		205	172	195										
TMF180 x 3.0P	230		215	182	210										
TMF190 x 3.0P	240	32	225	192	224	10	5	5	17	5	5	1220	19000	M10	360
TMF200 x 3.0P	245		237	202	229										